

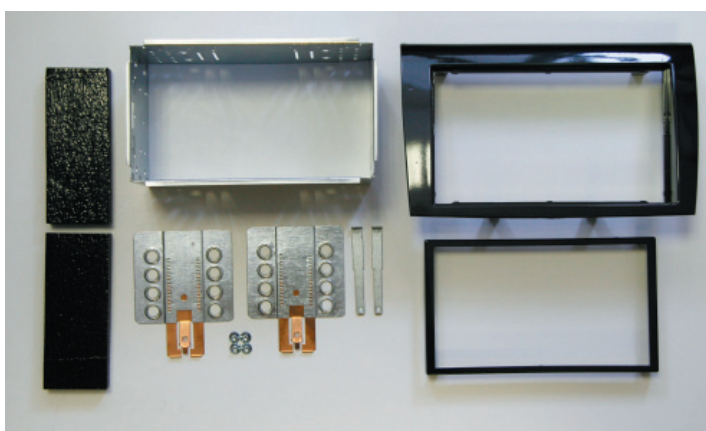


Installation manual for: **Fiat Bravo 2007 -->**



Installation kit includes the following items:



- * 1X 2-ISO 100 mm. metal bracket
- * 1X Replacement frame
- * 1X Radio trim
- * 2X Mounting plates
- * 2X Mounting spacers
- * 4X Screws
- * 2X Radio removal keys
- * 2X Cushion

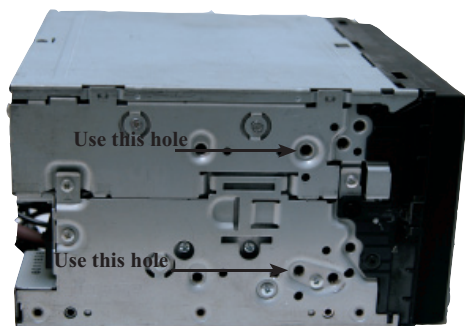

Kenwood DDX6029

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 10 & 12 marked with an arrow.
Measured from left to right.

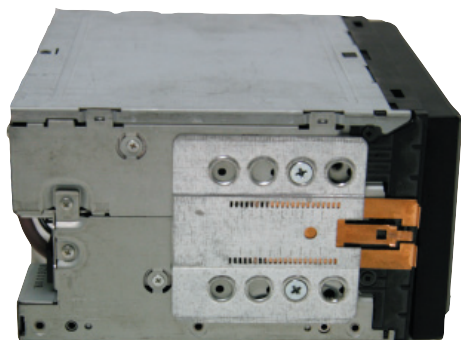

Kenwood DDX 7025

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 14 & 16 marked with an arrow.
Measured from left to right.

* Mount the plates.



Remove the radio using the original radio release keys.



Place the replacement panel and the 2-Din metal bracket.



Place the headunit and the radio trim.

Connect all of the needed wiring harnesses and check the connections carefully.