



Installation manual for: Mazda 5 2005 -->



Installation kit includes the following items:



- * 1X 2-ISO 100 mm. metal bracket
- * 1X Radio trim
- * 1X Replacement panel
- * 2X Mounting plates
- * 2X Mounting spacers
- * 2X Radio removal keys
- * 4X Screws
- * 2X Cushion

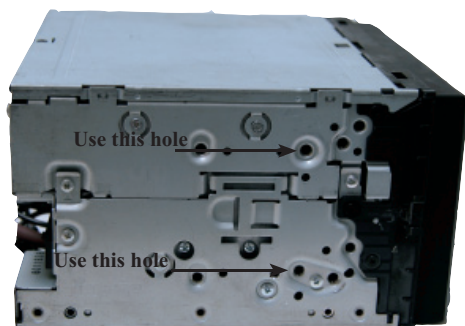

Kenwood DDX6029

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 7 & 9 marked with an arrow.
Measured from left to right.

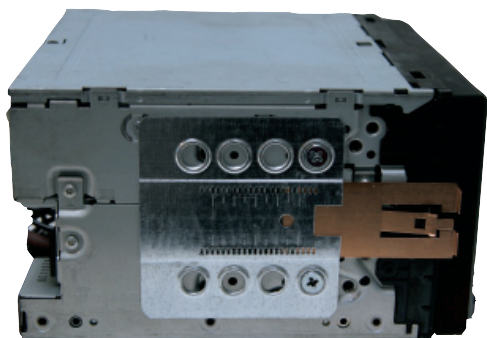

Kenwood DDX 7025

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 14 & 16 marked with an arrow.
Measured from left to right.

* Mount the plates.

Listen to the Future

1



Remove the panel around the gear lever.

2



Remove the screw at the location of the arrow.

3



Remove the screws behind the panel shown in 3A. This should be removed on the passenger and driver side. Remove the panel.

3A



Remove the screws on the location of the arrows shown in 3.

4



Remove the original radio panel.

5



Place the replacement frame and place the 2-Din metal bracket.

Use the clips from the original panel to tighten the replacement panel.

6



Place the headunit and radio trim.

Connect all of the needed wiring harnesses and check the connections carefully.