

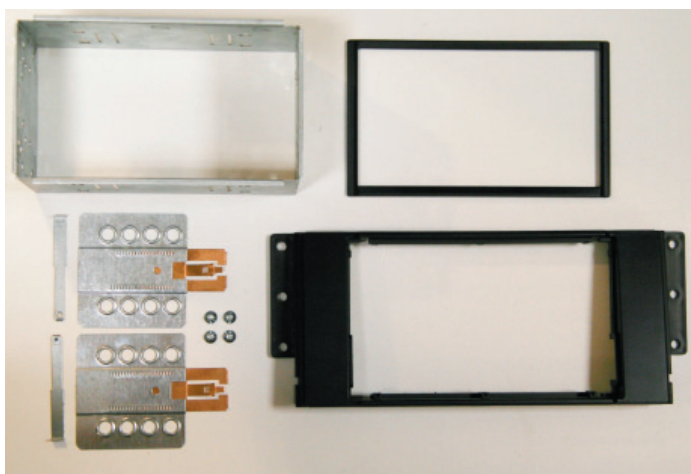


Installation manual for: Landrover Freelander II 2007 -->



Installation kit includes the following items:



- * 1X 2-ISO 100 mm. metal bracket
- * 1X Replacement frame
- * 1X Radio trim
- * 2X Mounting plates
- * 2X Mounting spacers
- * 4X Screws
- * 2X Radio removal keys

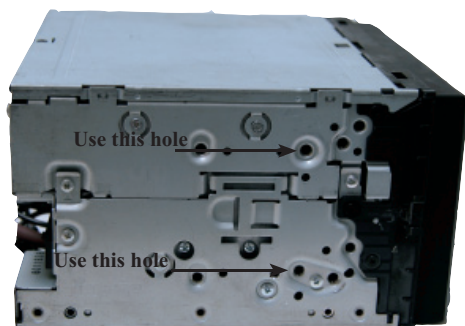

Kenwood DDX6029

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 3 & 5 marked with an arrow.
Measured from left to right.

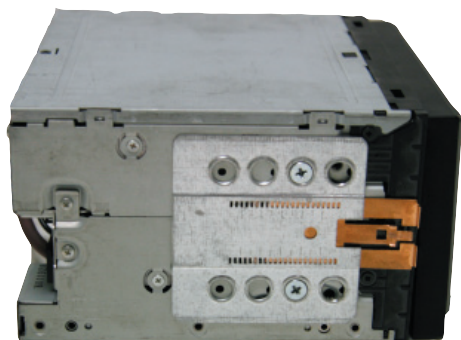

Kenwood DDX 7025

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 14 & 16 marked with an arrow.
Measured from left to right.

* Mount the plates.



Remove the dashboard panel at the location of the arrows.



Remove the rubber plaid.



Remove the four screws at the location of the arrows.



Remove the dashboard panel.

Remove the radio. This is tightened by four screws at the location of the arrows.



Place the replacement frame.

Connect all of the needed wiring harnesses and check the connections carefully.

7



Place the 2-Din metal bracket.

8



Place the the dashboard panel.

9



Place the headunit and radio trim.