Installation Manual Double DIN Set CAW 2294-04




(Beispielabbildung)

Mount the metal brackets with the double DIN head unit



(Beispielabbildung)





(Beispielabbildung)

The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)

 Push the Metal Frame into the facia plate, place both into the dashboard.

Connect all required circuit points and push the double DIN head unit in the metal frame until it snaps in. Fix the facia plate with the original screws, place the trim frame.

Reinstall everything in reverse order to finish installation.


© 12/2008 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.



Installation Manual

Double DIN Set CAW 2294-04

- Opel Agila B 2008 ->
- Suzuki Splash 2008->

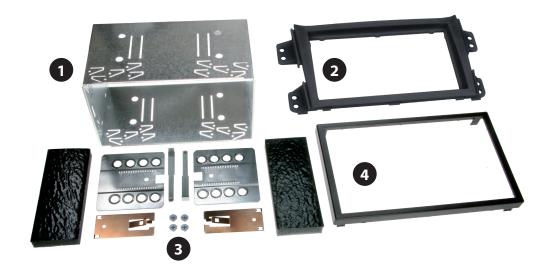

Double DIN Set contents


- (1) Metal Frame
- (2) Facia Plate

- (3) Installation Kit
- (4) Trim Frame

Compatible with these Kenwood devices

Kenwood Navigation

Installation Manual Double DIN Set CAW 2294-04




1. Remove the thin silver trim frame surrounding the gear shift





2. Remove the 2 screws left and right at the base of the silver trim frame.




3. Remove the gear lever cap.









 Open up the top glove box cover, remove the plastic screw located on the inside, gently.

5. Remove the thin silver trim frame, which is clipped to the dashboard.

6. Remove the 4 Phillips screws, remove the OEM Radio.

All installation work must be performed by a qualified professional installer only.

The manufacturer / dealer is not liable for any kind of incidential or indirect damages.